ATIS	APP	TWR	SMC		Bearings are Magnetic Elevations in FEET AMSL
116.4 134.5	118.2 124.2	120.5	121.7		



10 NM MSA 3800

DME USING AD DME
GPS REFERENCE WAYPOINT AD VOR

AD
VOR/DME 116.4



* NO CIRCLING SOUTH OF RWY 05/23 BEYOND 4 DME.

AD ELEV 20

TBD TO AD

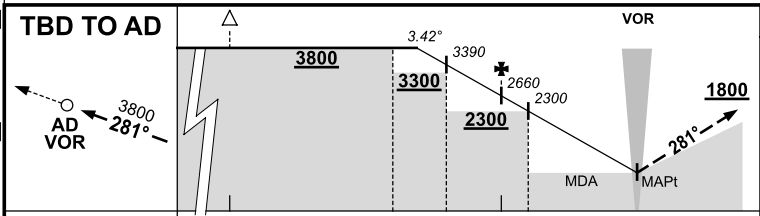

MISSED APPROACH:
TRACK 281°, CLIMB TO 1800FT; OR AS DIRECTED BY ATC.

CIRCLING MINIMA — **A,B: 900-2.4** — **C: 1000-4.0** — **D: 1000-5.0**

NM FM VOR	8.1	7	6	5	4	3	2	1	0
ALT (3.42° APCH PATH)	3800	3390	3020	2660	2300	1940	1570	1210	900

SECTOR A*

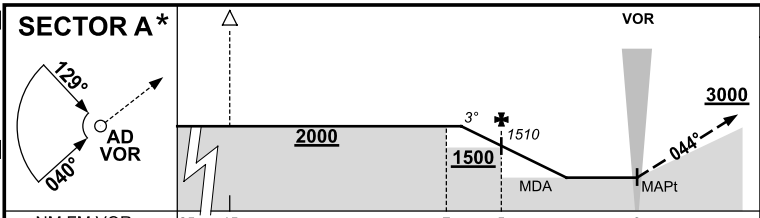

MISSED APPROACH:
TRACK 044° TO MBY NDB, CLIMB TO 3000FT OR AS DIRECTED BY ATC.

* **NOTE:** MBY NDB (377) REQUIRED FOR PROCEDURE.

CIRCLING MINIMA — **A,B: 900-2.4** — **C: 1000-4.0** — **D: 1000-5.0**

NM FM VOR	6.5	6	5	4	3.4	3.3
ALT (3° APCH PATH)	2000	1830	1510	1190	1000	900

SECTOR B

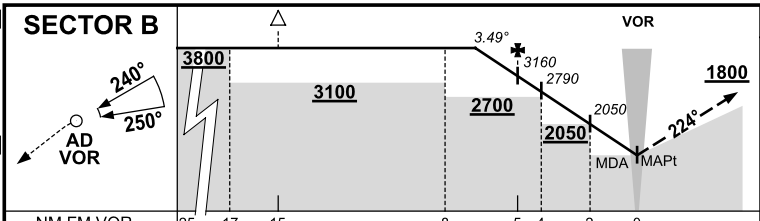

MISSED APPROACH:
TURN LEFT, TRACK 224°, CLIMB TO 1800FT; OR AS DIRECTED BY ATC.

CIRCLING MINIMA — **A,B: 1310-2.4** — **C: 1310-4.0** — **D: 1310-5.0**

NM FM VOR	6.7	6	5	4	3	2	1	0
ALT (3.49° APCH PATH)	3800	3530	3160	2790	2420	2050	1680	1310

PADDG01-117

© Airservices Australia 2009